


Wedgegard® Type DIN Spacer - Manual Reset

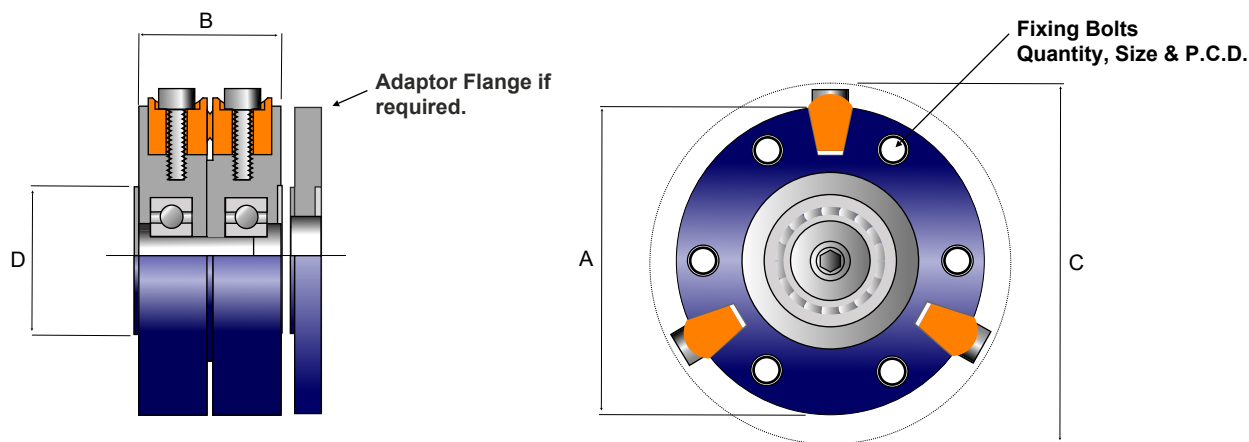

Size - DIN	90	100	120	150	180	225	250	285	315	350	390	435
UJ Shaft Size	90	100	120	150	180	225	250	285	315	350	390	435
Max Release/Shear Torque (Nm)	Brass	1941	1941	5840	7460	9080	-	-	-	-	-	-
	Steel	2670	2670	8020	10260	12480	50000	56000	65000	86000	128000	135000
Max Release/Shear Torque (lb ft)	Brass	1430	1430	4300	5500	6700	-	-	-	-	-	-
	Steel	1970	1970	5915	7565	9200	36880	41300	47950	63430	94400	99495
Wedgeslot Quantity & Wedgepin Type	3 x W37	3 x W37	4 x W50	4 x W50	4 x W50	4 x W100	4 x W100	4 x W100	4 x W100	4 x W120	4 x W120	4 x W120
Pin Working Radius (PWR)	45	45	54	69	84	100	112.5	130	145	171.5	180	202
Outside Diameter (A)	100	100	120	150	180	225	250	285	315	375	390	435
Length (B)	37	36	58	73	73	82	89	115	120	150	150	195
Clearance Diameter (C)	115	115	140	180	210	265	290	325	360	430	450	480
Spigot Diameter (D)	47	57	75	90	110	105	105	145	175	220	170	190
Bolt Fixing Quantity & Size	4 x M8	6 x M8	8 x M8	8 x M12	8 x M14	8 x M16	8 x M18	8 x M20	10 x M22	10 x M22	10 x M24	16 x M27
Bolt Fixing P.C.D.	74.5	84	101.5	130	155.5	196	218	245	280	310	345	385

*Dimensions and specifications may change for improvement without notice.

Fits standard DIN UJ (Universal Joint) companion flanges.

Release torque is adjustable by Wedgepin ratings.

The maximum release torque is based on maximum Wedgepin capacity and not UJ shaft capacity- Check your UJ shaft manufacturers max load rating.

Adaptor Flange maybe required when fitting to PTO Gear Box Flange.

Spigot diameters may change on higher rated UJ shafts.

Sizes 150 and above are supplied with face keyways.

When selecting high overloads always limit the release torque to 90% of UJ shaft manufacturers full load rating.

Non Standard units can be made to order.

All dimensions in mm.